

Model 450 Wall-Mounted Sky Sentry

Model # SS-450-SKY

Product Specifications

BASE UNIT DIMENSIONS

21" Length
 20" Width, *Not Including Mounting Brackets*
 19.5" Height

ARM DIMENSIONS

4" Dia., 32" Long Fire-Retardant Flex Arm and 15" L
 Stainless Steel Ducting (7" Dia. Round Hood)

CABINET MATERIAL

16 ga. Carbon Steel

WEIGHT

Approx. 60 lbs. - 100 lbs.
Varies Depending on Filter Media Installed

AIR VOLUME

Variable Speed Control Standard on 115V
 500 CFM High, Down to 50 CFM Low
 On/Off Toggle Switch Standard on 220V

ELECTRICAL

115/1/60, 10.7 amps
 220/1/50, 5.35 amps
 8' grounded power cord with NEMA 5-15P Plug

SOUND LEVEL

Approx. 72 dba @ 3'


FILTRATION

Depending on the Application:

- HEPA [up to 99.97% efficient on particles 0.3 microns and larger]
- ASHRAE [up to 95% efficient on particles 0.5 microns and larger]
- ACTIVATED CARBON
- SPECIALTY-BLENDED FILTER MEDIA [i.e. Acid Gas, Mercury, Aldehyde, Ammonia]

WARRANTY

Limited six-month warranty from date of shipment for the fan/motor assembly. Limited two-year warranty from date of shipment on defects to parts/assembly due to materials or workmanship.
 PATENT #5,843,197

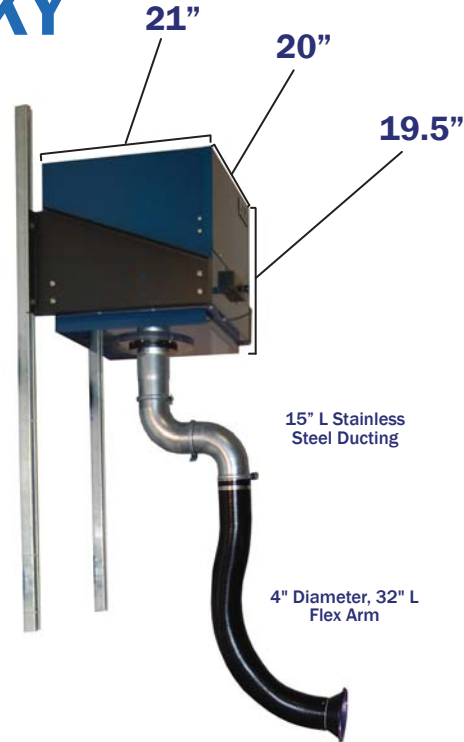

Dimensions are Approximate
 Shown with Optional Accessories



Product Features

- Variable Speed Controller *Included (115V only)*
- Reliable, Low Maintenance Operation
- Long Filter Life
- Wall-Mounting Brackets *Included*
- Low Power Consumption
- Optional Magnehelic Gage
- Self Supportive, Flexible Arm
- Simple, Quick "No Tool" Filter Change

The **Sky Sentry** is a wall-mounted fume extractor that features a free-hanging, self-supportive and flame-retardant flex arm that can easily be maneuvered by the operator to their desired location. In limited space environments, this unit frees up valuable benchtop and floor space while the flex arm provides a 62.5" swivel radius.

Typical applications for this system include: welding fume extraction, brazing fume control, particulate extraction, removal of organic vapors, solvent and epoxy fumes, chemical fumes, light grinding, and various other industrial processes where a wall-mounted fume extractor is needed.

Depending on the application, several filter combinations can be utilized. Typical filtration media include: HEPA [up to 99.97% efficient on particles 0.3 microns and larger], ASHRAE [up to 95% efficient on particles 0.5 microns and larger], Activated Carbon, and specialty-blended filtration media [i.e. Acid Gas, Mercury, Aldehyde, Ammonia]. Multiple filter media can be housed inside the filter chamber for applications that emit both particulates and fumes.

Three smaller models [SS-200-SKY & SS-300-SKY & SS-400-SKY] are available.



1.800.799.4609
www.sentryair.com
sales@sentryair.com

